


PHYSICAL SPECIFICATION

Nominal Voltage		2V
Nominal Capacity (10HR)		1000Ah
Dimension	Length	475±2mm (18.70 inches)
	Width	174±2mm (6.85 inches)
	Container Height	328±2mm (12.91 inches)
	Total Height	365±2mm (14.37 inches)
Weight		Approx. 63.5Kg (140.0lbs)
Standard Terminal		Bolt-and-nuts terminal Bolt Type: M8

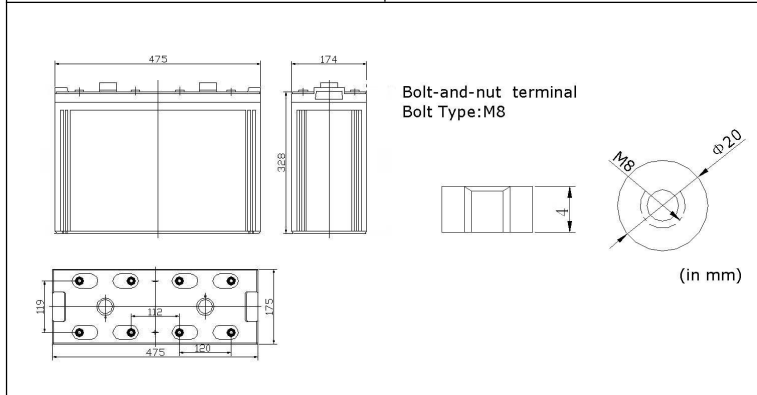


Shimastu Gel series Gel Batteries are manufactured with special separators and silica gel immobilizing the electrolyte inside the battery, it is perfect for frequent cyclic deep discharge or standby applications under harsh environments, and has a long service life.

Features:

1. Special polar plate design, which ensures a designed floating charge life of 20 years at 25°C (77 °F)
2. Equalized current distribution, the active material is not easy to fall off
3. High gas recombination efficiency
4. Good deep discharge resilience performance
5. No delamination phenomena in the electrolyte
6. Manufactured with high-porosity

ELECTRICAL SPECIFICATION

Characteristics		
Capacity	20 hour rate (50A)	1050Ah
	10 hour rate (100A)	1000Ah
	5 hour rate (170A)	850Ah
	3 hour rate (250A)	750Ah
	1hour rate (600A)	600Ah
Capacity affected by temperature	40°C (104 °F)	102%
	25°C (77 °F)	100%
	0°C (32 °F)	85%
Max. Discharge Current	3500A (5 sec)	
Short Circuit Current	6800A	
Designed floating life	20 years (at 25°C)	
Internal Resistance	Full charged battery (25°C, 77 °F) 0.23mΩ	
Constant Voltage Charge	Cycle	Initial Charging Current less than 250A Voltage 2.35~2.40V at 25°C (77 °F) Temperature Coefficient -5mV/°C
	Standby	No limit on Initial Charging Current Voltage 2.23V at 25°C (77 °F) Temperature Coefficient -3.3mV/°C

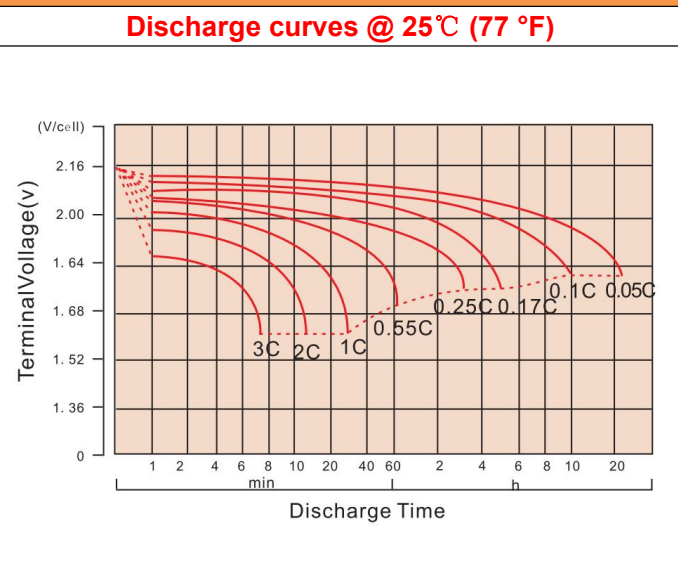


CONSTANT CURRENT DISCHARGE RATING A@25°C

F.V/TIME	15MIN	30MIN	1HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	1461.4	967.3	612.5	283.0	227.3	189.4	127.1	105.8	55.1
1.65V	1369.2	928.6	591.5	274.2	221.3	184.2	125.4	104.4	54.4
1.70V	1282.2	887.6	572.4	266.7	215.3	179.4	123.6	103.0	53.6
1.75V	1193.4	848.5	550.0	258.5	209.8	174.8	121.9	101.3	53.0
1.80V	1102.2	810.8	530.3	250.0	203.8	170.0	119.9	100.0	52.5


CONSTANT POWER DISCHARGE RATING WATT PER CELL@25°C

F.V/TIME	15MIN	30MIN	1HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	2555.0	1756.8	1150.9	539.8	436.7	365.0	250.0	208.8	108.4
1.65V	2429.3	1704.3	1117.8	526.1	426.1	356.2	245.7	205.7	107.0
1.70V	2309.2	1645.4	1088.2	513.3	416.1	348.0	242.3	202.9	106.0
1.75V	2180.2	1589.0	1052.5	500.8	407.1	340.5	239.4	200.0	105.0
1.80V	2041.3	1534.0	1020.5	485.4	397.1	332.3	236.6	196.7	104.0


Cycle service life

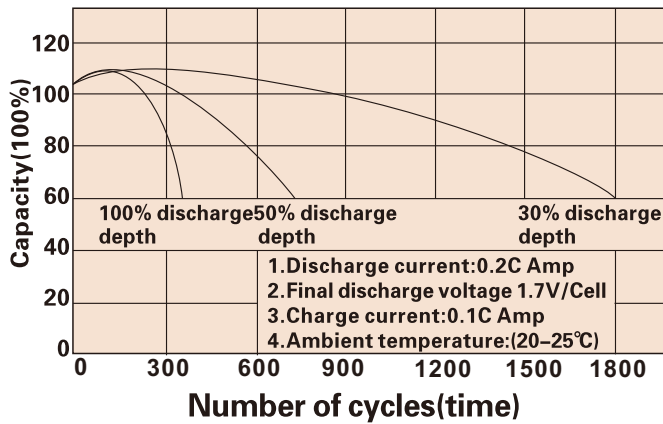


Trickle(or float) service life

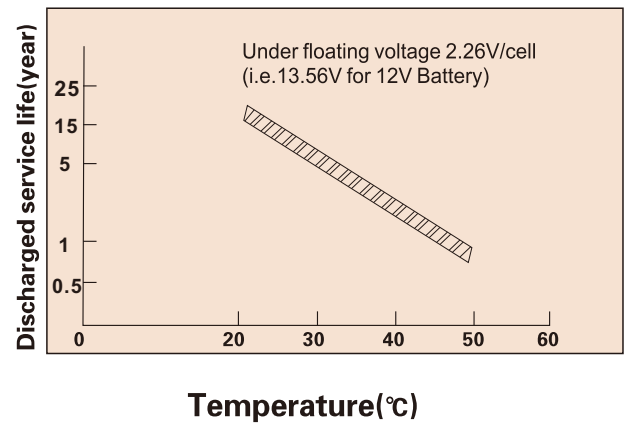


Storage time(months)

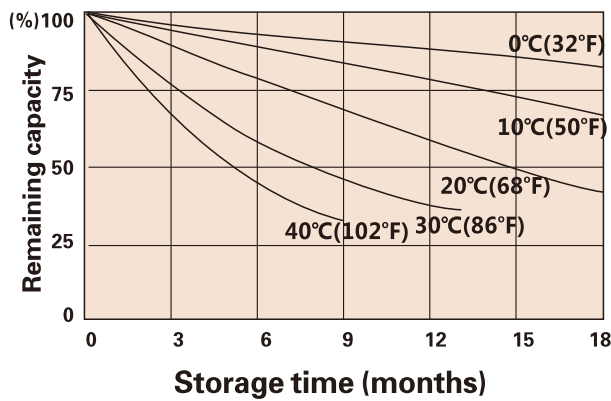

Temperature and discharge capacity

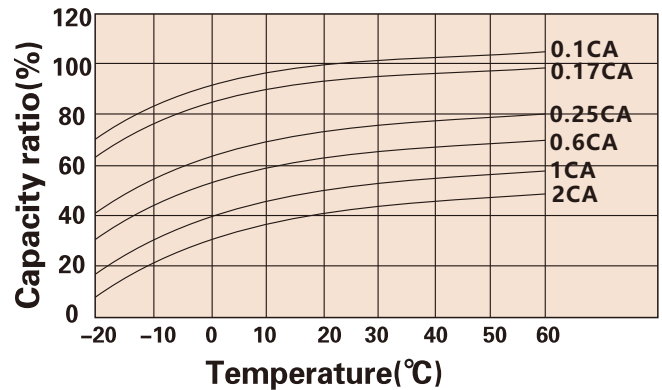

Charging characteristic

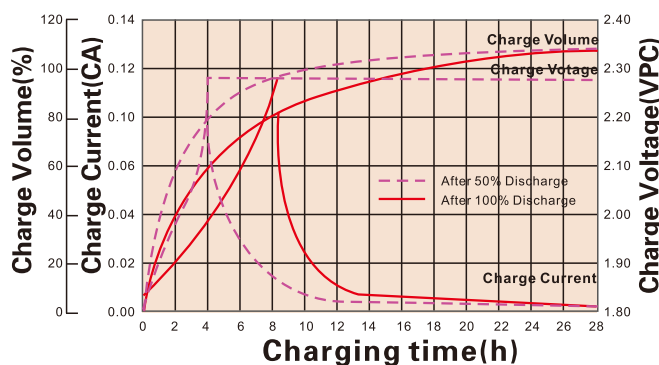

Storage Temperature	Supplementary Charge Interval	Charge Method
≤20°C	Every 12 months	Less or 24 hours with a constant voltage of 2.3V/cell
20-30°C	Every 8 months	12-18 hours with a constant voltage of 2.45V/cell
≥30°C	Storage to be avoided	8-12 hours with a constant current of 0.05CA

APPLICATIONS

Standby Usage:

- UPS
- Emergency Lights
- Alarm Systems
- Telecommunication Systems

Cyclic Usage:

- Medical Equipments
- Electric Instruments
- Toys
- Camcorder and Solar Systems

Motive Usage:

- Golf Cars
- Wheelchairs
- Lawnmowers
- Motorcycle

(Note) All above information shall be changed without prior notice, Shimastu reserves the right to explain and update the latest information.