


PHYSICAL SPECIFICATION

Nominal Voltage		2V
Nominal Capacity (10HR)		2000Ah
Dimension	Length	491±2mm (19.33 inches)
	Width	351±2mm (13.82 inches)
	Container Height	344±2mm (13.54 inches)
	Total Height	383±2mm (15.08 inches)
Weight		Approx. 134Kg ±3% (295.lbs)
Standard Terminal		Bolt-and-nuts terminal Bolt Type: M8

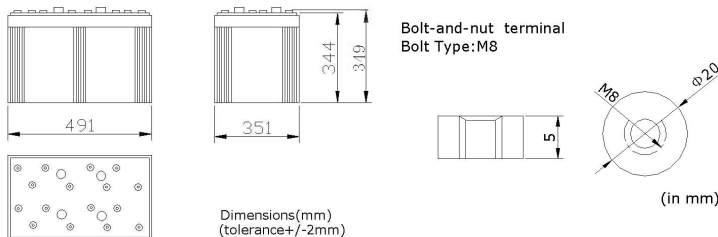

Shimastu Gel series Gel Batteries are manufactured with special separators and silica gel immobilizing the electrolyte inside the battery, it is perfect for frequent cyclic deep discharge or standby applications under harsh environments, and has a long service life.

Features:


1. Special polar plate design, which ensures a designed floating charge life of 20 years at 25°C (77 °F)
2. Equalized current distribution, the active material is not easy to fall off
3. High gas recombination efficiency
4. Good deep discharge resilience performance
5. No delamination phenomena in the electrolyte
6. Manufactured with high-porosity

ELECTRICAL SPECIFICATION

Characteristics

Capacity	10 hour rate (200A)	2000Ah
	5 hour rate (340A)	1700Ah
	3 hour rate (500A)	1500Ah
	1 hour rate (1100A)	1100Ah
Capacity affected by temperature	40°C (104 °F)	102%
	25°C (77 °F)	100%
	0°C (32 °F)	85%
Max. Discharge Current	7000A (5 sec)	
Short Circuit Current	13300A	
Designed floating life	20 years (at 25°C)	
Internal Resistance	Full charged battery (25°C, 77 °F) 0.15mΩ	
Constant Voltage Charge	Cycle	Initial Charging Current less than 500A Voltage 2.35~2.40V at 25°C (77 °F) Temperature Coefficient -5mV/°C
	Standby	No limit on Initial Charging Current Voltage 2.23V at 25°C (77 °F) Temperature Coefficient -3.3mV/°C

Discharge curves @ 25°C (77 °F)

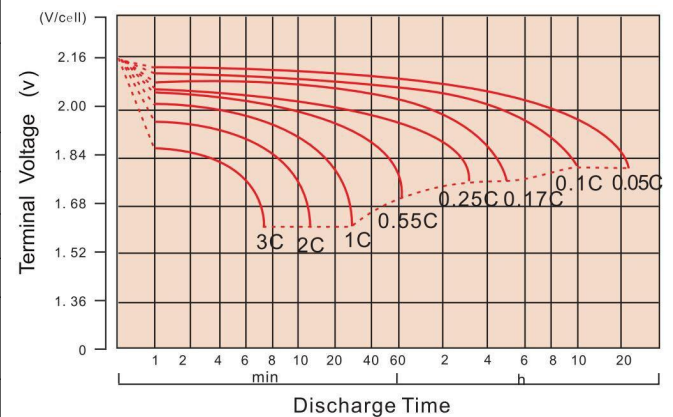


CONSTANT CURRENT DISCHARGE RATING A@25°C

F.V/TIME	15MIN	30MIN	1HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	2922.7	1934.5	1225.1	566.1	454.7	378.8	254.3	211.5	110.3
1.65V	2738.4	1857.3	1183.0	548.5	442.7	368.5	250.9	208.9	108.9
1.70V	2564.5	1775.1	1144.9	533.3	430.6	358.8	247.1	206.0	107.3
1.75V	2386.8	1696.9	1100.0	517.0	419.6	349.7	243.7	202.5	106.1
1.80V	2204.3	1621.7	1060.6	500.0	407.6	340.0	239.7	200.0	105.0


CONSTANT POWER DISCHARGE RATING WATT PER CELL@25°C

F.V/TIME	15MIN	30MIN	1HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	5110.0	3513.6	2301.7	1079.7	873.3	730.0	500.0	417.6	216.9
1.65V	4858.6	3408.7	2235.6	1052.2	852.3	712.3	491.4	411.4	214.0
1.70V	4618.5	3290.8	2176.4	1026.6	832.2	696.0	484.5	405.7	212.0
1.75V	4360.4	3178.0	2105.0	1001.5	814.2	680.9	478.8	400.1	210.0
1.80V	4082.5	3068.1	2041.1	970.8	794.2	664.6	473.1	393.4	208.1

Cycle service life

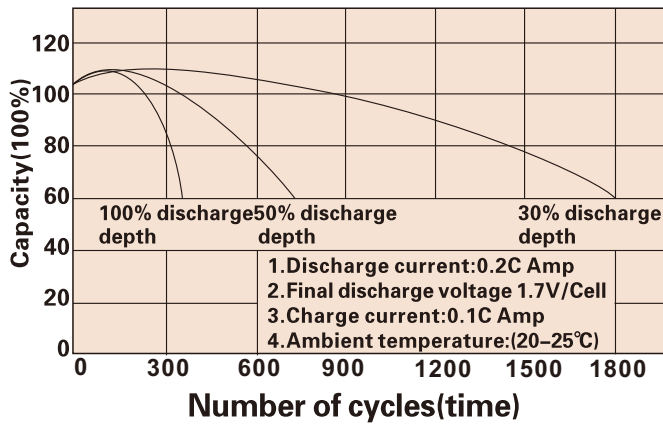


Trickle(or float) service life

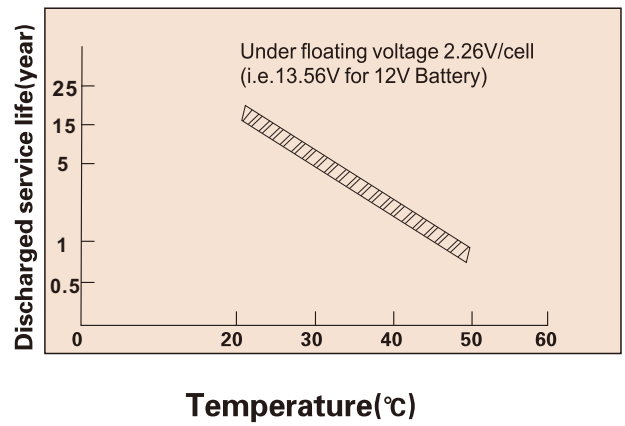


Storage time(months)



Temperature and discharge capacity

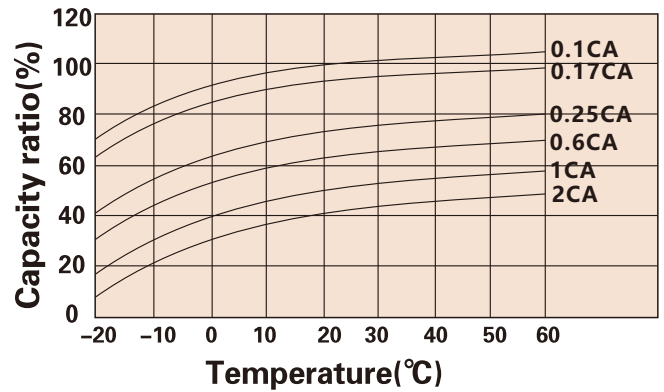

Charging characteristic

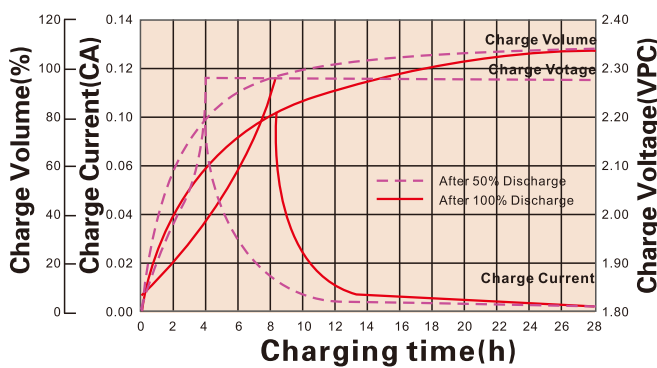

Storage Temperature	Supplementary Charge Interval	Charge Method
≤20°C	Every 12 months	Less or 24 hours with a constant voltage of 2.3V/cell
20-30°C	Every 8 months	12-18 hours with a constant voltage of 2.45V/cell
≥30°C	Storage to be avoided	8-12 hours with a constant current of 0.05CA

APPLICATIONS

Standby Usage:

- UPS
- Emergency Lights
- Alarm Systems
- Telecommunication Systems

Cyclic Usage:

- Medical Equipments
- Electric Instruments
- Toys
- Camcorder and Solar Systems

Motive Usage:

- Golf Cars
- Wheelchairs
- Lawnmowers
- Motorcycle

(Note) All above information shall be changed without prior notice, Shimastu reserves the right to explain and update the latest information.